



Note:
Supplied with 6-32 x 1/2 Socket Flat Head Cap Screws

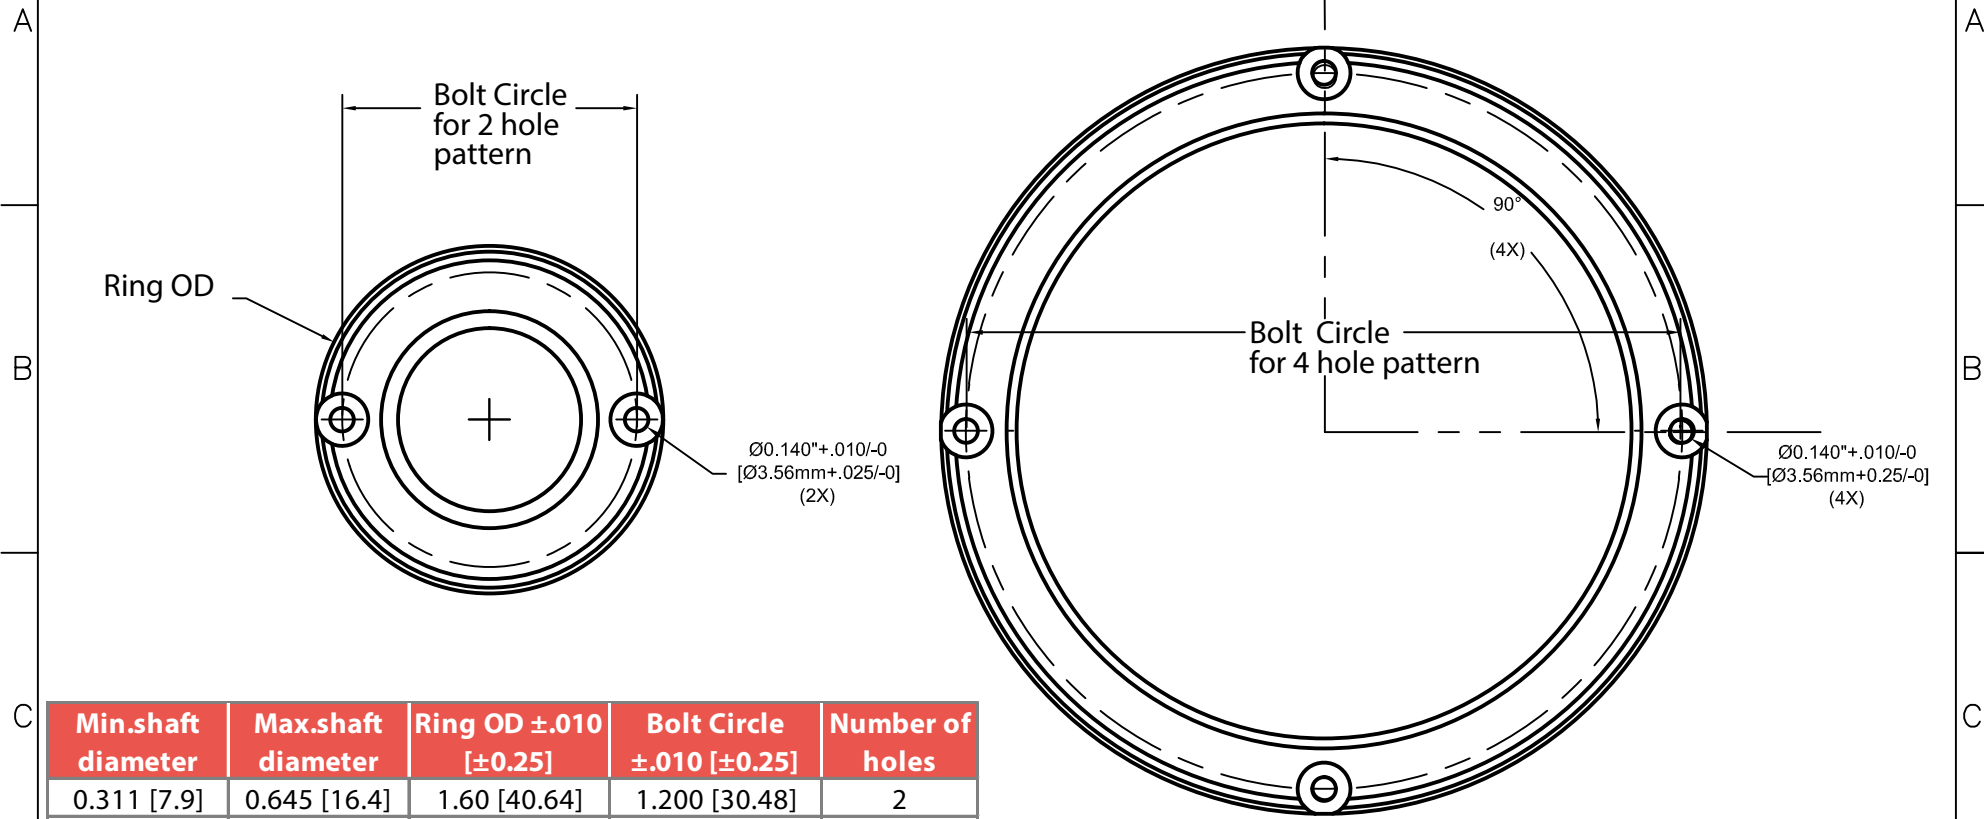

| Min.shaft diameter | Max.shaft diameter | Ring OD ± 0.10 [± 0.25] | Bolt Circle ± 0.10 [± 0.25] | Number of holes |
|--------------------|--------------------|--------------------------------------|---------------------------------------|-----------------|
| 0.311 [7.9] | 0.645 [16.4] | 1.60 [40.64] | 1.200 [30.48] | 2 |
| 0.646 [16.5] | 1.395 [35.4] | 2.10 [53.34] | 1.783 [45.29] | 2 |
| 1.396 [35.5] | 2.020 [51.3] | 2.68 [68.07] | 2.433 [61.80] | 2 |
| 2.021 [51.4] | 2.395 [60.8] | 3.10 [78.74] | 2.783 [70.69] | 2 |
| 2.396 [60.9] | 2.895 [73.5] | 3.60 [91.44] | 3.294 [83.67] | 2 |
| 2.896 [73.6] | 3.395 [86.2] | 4.10 [104.14] | 3.806 [96.67] | 2 |
| 3.396 [86.3] | 3.895 [98.9] | 4.60 [116.84] | 4.300 [109.22] | 4 |
| 3.896 [99.0] | 4.395 [111.6] | 5.10 [129.54] | 4.783 [121.49] | 4 |
| 4.396 [111.7] | 4.895 [124.3] | 5.60 [142.24] | 5.282 [134.16] | 4 |
| 4.896 [124.4] | 5.395 [137.0] | 6.10 [154.94] | 5.783 [146.89] | 4 |
| 5.396 [137.1] | 5.895 [149.7] | 6.60 [167.64] | 6.290 [159.77] | 4 |
| 5.896 [149.8] | 6.020 [152.9] | 7.10 [180.34] | 6.596 [167.54] | 4 |

| | | |
|--|--------------|--|
| Part Number | Description | Qty |
| <p>THEREIN, ARE THE EXCLUSIVE PROPERTY OF ELECTRO STATIC TECHNOLOGY ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT CONSENT, BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT BUSINESS WITH E.S.T.</p> | | |
| <p>UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN:</p> <p>MILLIMETERS <input checked="" type="checkbox"/></p> <p>INCHES <input checked="" type="checkbox"/></p> <p>UNTOLERANCED DIMENSIONS</p> | |  <p>ELECTRO STATIC TECHNOLOGY AN ITW COMPANY</p> <p>31 WINTERBROOK ROAD, MECHANIC FALLS, MAINE 04256 PHONE (207)998-5140 FAX (207)998-5143</p> |
| OVER | TO TOLERANCE | |
| DATE: 9/3/2014 | | AEGIS SGR Bolt Through Mounting-Flat Head |
| ENGINEER: J. Audet | | DRAWING NO. SGR-XXX.X-3FH Rev A |