

1 2 3 4 5 6

A



B

C

A

B

C

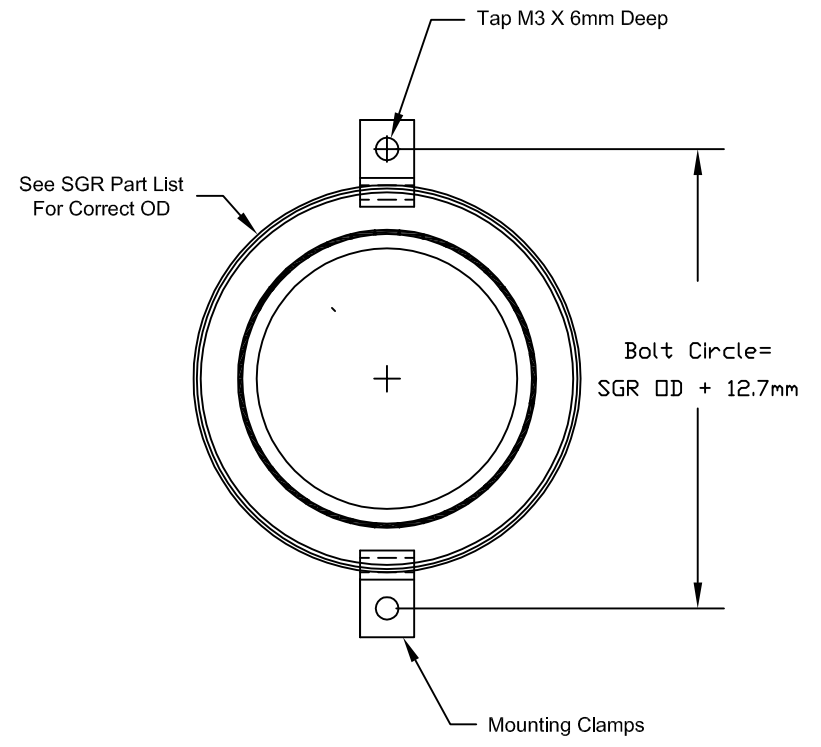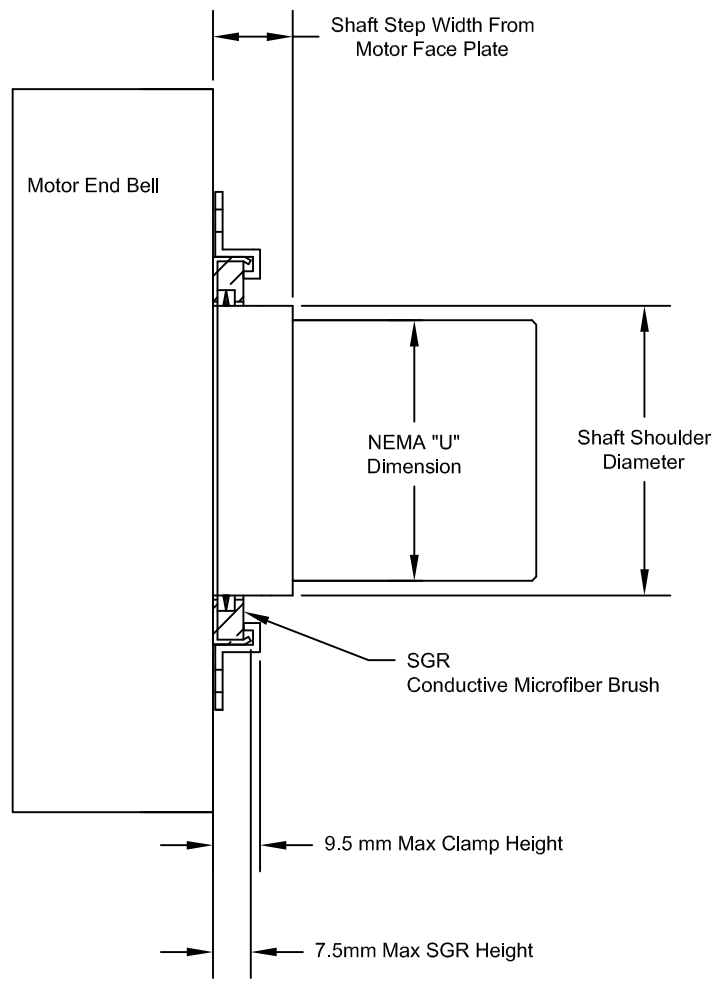

SGR OD (mm)

40.6	116.8
53.3	129.5
68.1	142.2
78.7	154.9
91.4	167.6
104.1	180.3

Note;
To Be Supplied With Appropriate Number Of M3 X 8 SHCS
And Internal Tooth Lock Washers.

THEREIN, ARE THE EXCLUSIVE PROPERTY OF ELECTRO STATIC TECHNOLOGY ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT CONSENT, BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT BUSINESS WITH E.S.T.

UNLESS OTHERWISE SPECIFIED
DIMENSIONS ARE IN.
MILLIMETERS <input type="checkbox"/>
INCHES <input checked="" type="checkbox"/>
UNTOLERANCED DIMENSIONS
TOLERANCE
+/- 0.50
DATE: 12/11/07
ENGINEER: J. Richardson



ELECTRO STATIC TECHNOLOGY
AN ITW COMPANY

31 WINTERBROOK ROAD, MECHANIC FALLS, MAINE 04256
PHONE (207)998-5140 FAX (207)998-5143

AEGIS SGR Bearing Protection Ring
CUSTOMER:

EST P/N: SGR-XXX.X-2 Rev.

1 2 3 4 5 6

D

D