

1

2

3

4

5

6

A

B

C


D

A


B

C

D

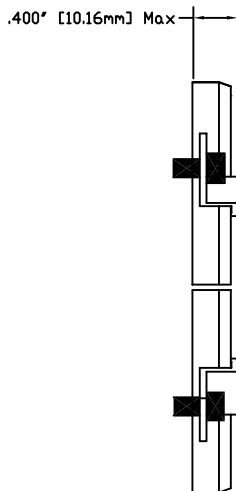

Bolt Circle =  
SGR OD +.500" [12.7mm]

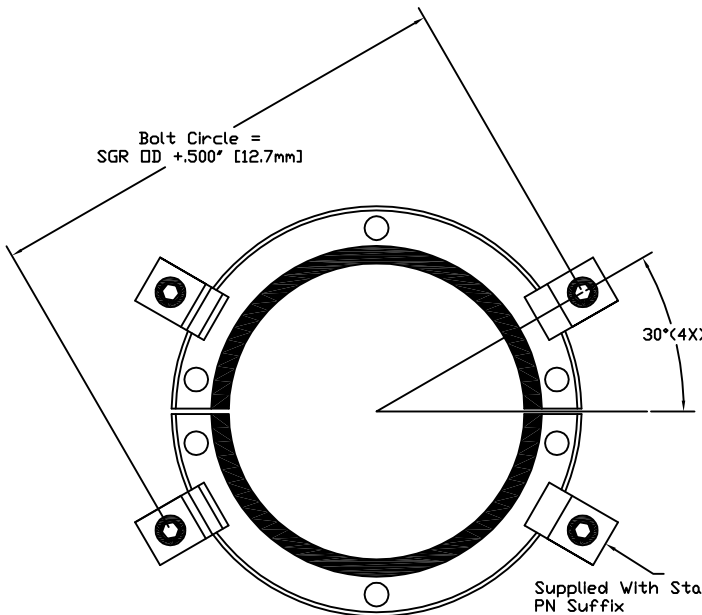


Supplied With Standard Mounting Brackets  
PN Suffix  
-1A4: Supplied With 6-32 X 1/4" SHCS & Lock Washers  
-2A4: Supplied With M3 X .5 X 8 SHCS & Lock Washers

### AEGIS Split Ring

Materials;  
Holder: Aluminum  
Fiber: Conductive Microfiber  
Refer to Part List For Dimensions

Bolt Pattern Template for Standard Split Rings  
With SGR OD,s From 1.6" [40.6mm] to 3.1" [78.8mm]

Part Number	Description	Qty
THEREIN, ARE THE EXCLUSIVE PROPERTY OF ELECTRO STATIC TECHNOLOGY ISSUED IN STRICT CONFIDENCE AND SHALL NOT WITHOUT CONSENT, BE REPRODUCED, COPIED OR USED FOR ANY PURPOSE WHATSOEVER, EXCEPT BUSINESS WITH E.S.T.		
UNLESS OTHERWISE SPECIFIED		
DIMENSIONS ARE IN:		
MILLIMETERS	<input type="checkbox"/>	
INCHES	<input checked="" type="checkbox"/>	
UNTOLERANCED DIMENSIONS		
TOLERANCE		
 <b>ELECTRO STATIC TECHNOLOGY</b> AN ITW COMPANY		
31 WINTERBROOK ROAD, MECHANIC FALLS, MAINE 04256 PHONE (207)998-3493 FAX (207)998-5143		
AEGIS Standard Split Ring With 4 Brackets		
DATE: 9/10/09/2008	DRAWING NO.	*A
ENGINEER: J. Richardson		

1

2

3

4

5

6